


# CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS




## ASSEMBLY INSTRUCTION MODEL #9236-BK


Drawing (1)

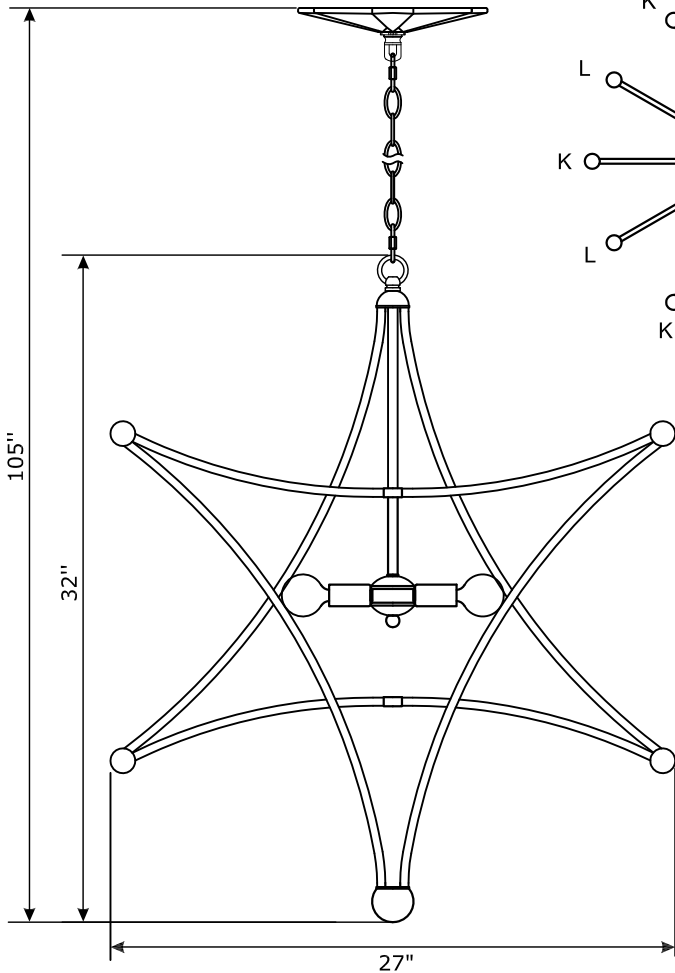

Arm distribution



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 4-Candelabra  
40 Watts G16.5 Recommended 60 Watts Max.  
USE LED BULBS FOR EXTENDED USE  
THIS FIXTURE IS DRY RATED

Please place the fixture frame on a soft cloth covered table before the installation.

1. Insert the bottom end of the Upper Arm (K) onto the stud on the metal cluster (P) then loosely secure it with the Screws (M) using the Wrench (N) supplied. Do not tighten it until you complete step #2. Repeat for all the other Upper Arms (K).
2. Screw the Center stem (I) onto the Light Cluster (O). Align the hole on the end of the Upper Arm (K) with hole on the top metal plate on the Light Cluster (O) and secure with screws using the screwdriver.
3. Feed the fixture wires through the Cap (H) and secure with the loop (G).
4. Insert the top end of the Lower Arm (L) onto the stud on the Center stem (I) then loosely secure it with the Screws (M) using the Wrench (N) supplied. Do not tighten it until you complete step #5. Repeat for all the other Lower Arms (L).
5. Place the metal plate (Q) over the end of the Lower Arm (L) and secure with the Screw (J) using a screwdriver. Screw the Ball finial (R) over the metal plate (Q).
6. Determine the preferred hanging height and choose the correct length of chains needed.
7. Raise the fixture up to the ceiling and do the wire connections. Raise the canopy up to the ceiling and secure with the screw collar loop ring.
8. Install the Bulbs (S) into the Socket.

Drawing (2)

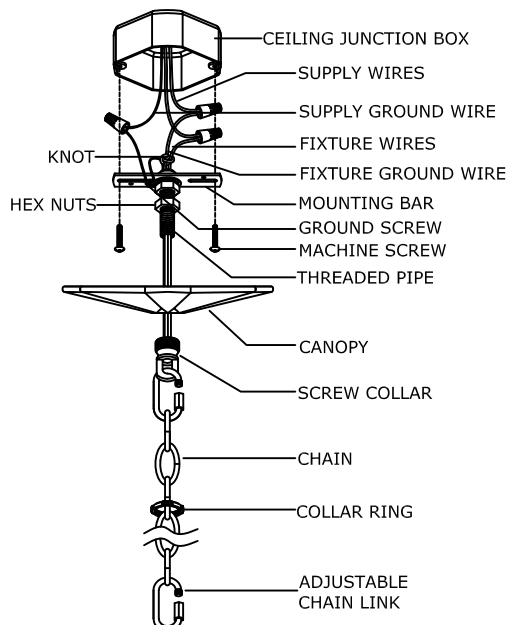


**WARNING:** This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

# CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



## ASSEMBLY INSTRUCTION MODEL #9236-BK

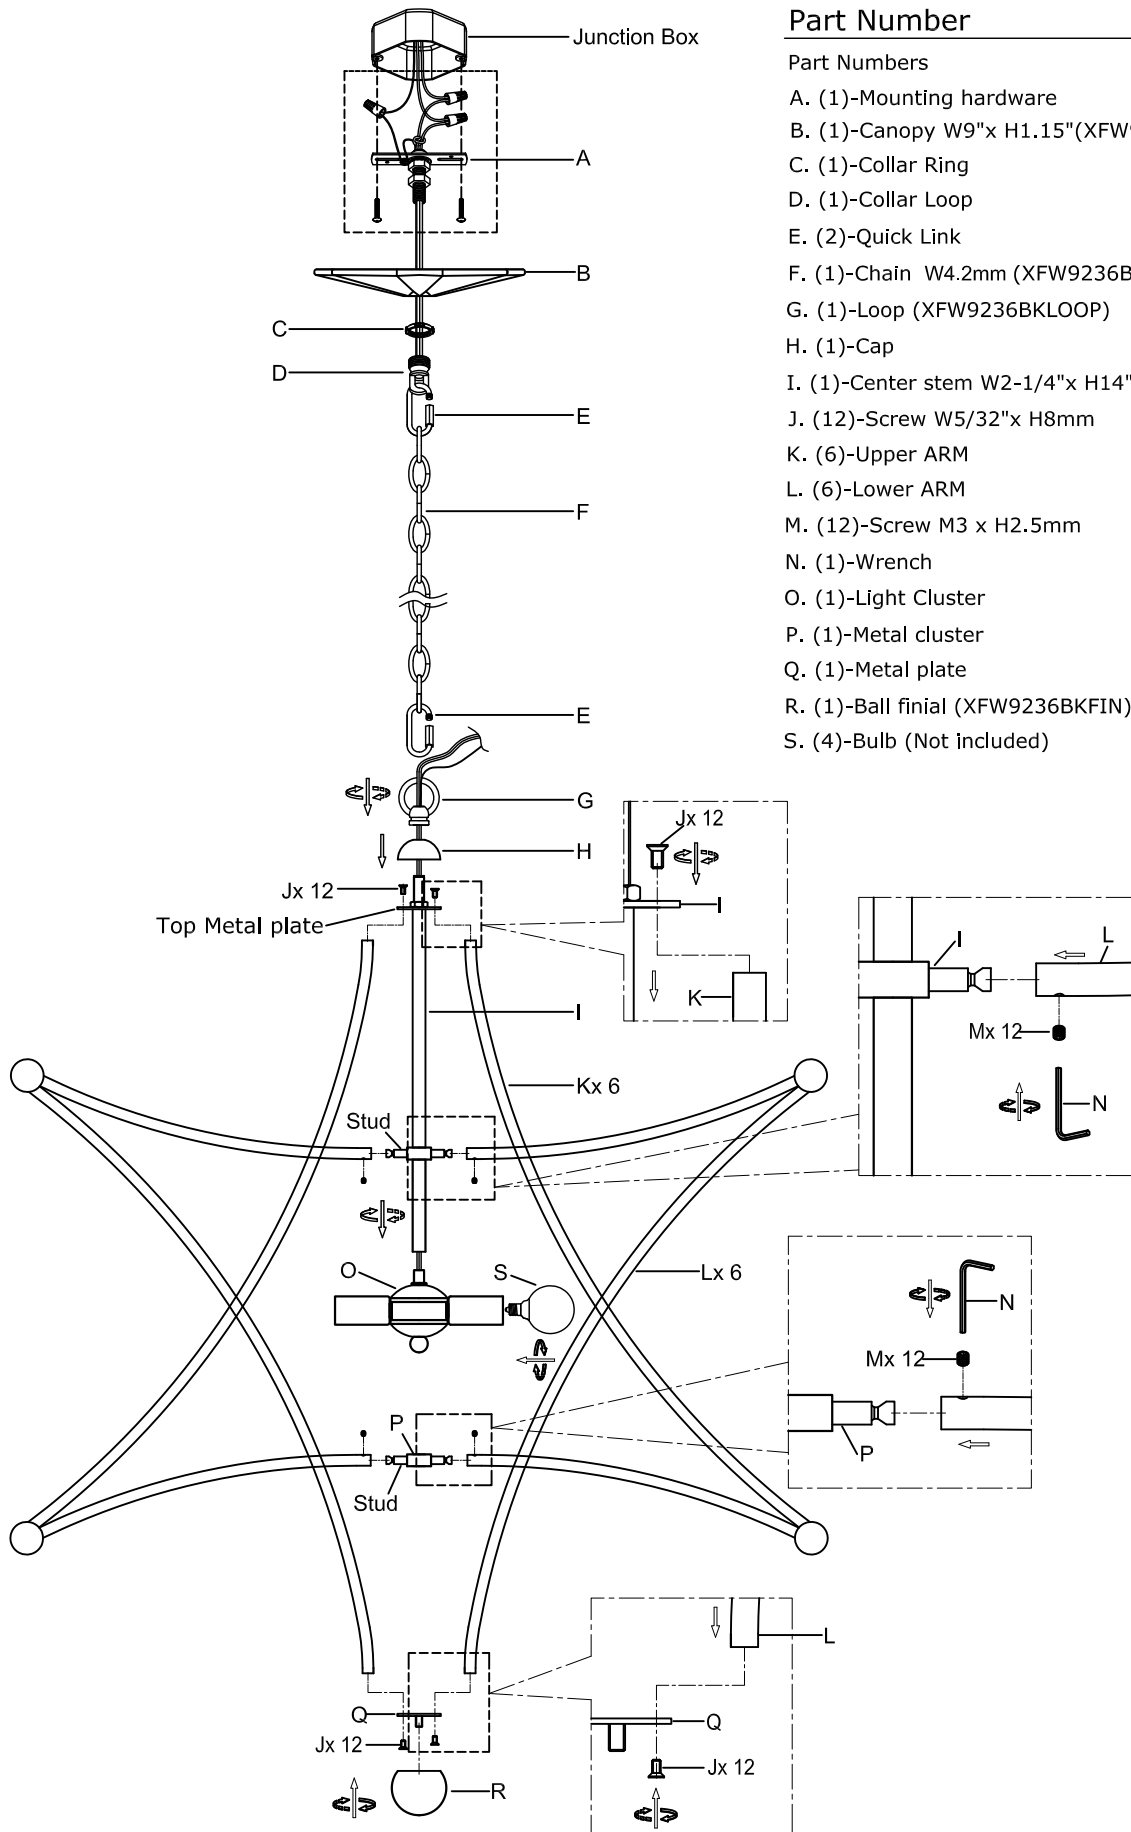

### Part Number

#### Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W9"x H1.15"(XFW9236BKCAN9IN)
- C. (1)-Collar Ring
- D. (1)-Collar Loop
- E. (2)-Quick Link
- F. (1)-Chain W4.2mm (XFW9236BKCHA4.2MM)
- G. (1)-Loop (XFW9236BKLOOP)
- H. (1)-Cap
- I. (1)-Center stem W2-1/4"x H14" (XFW9236BKSTEM14IN)
- J. (12)-Screw W5/32"x H8mm
- K. (6)-Upper ARM
- L. (6)-Lower ARM
- M. (12)-Screw M3 x H2.5mm
- N. (1)-Wrench
- O. (1)-Light Cluster
- P. (1)-Metal cluster
- Q. (1)-Metal plate
- R. (1)-Ball finial (XFW9236BKFIN)
- S. (4)-Bulb (Not included)