

WAC LIGHTING

2.5" Low Voltage Adjustable Trim

| Model & Light Source | Lumens | Finish |
|---|--------|---|
| HR-837 Halogen MR16 HR-837LED LED MR16 | | BK Black BN Brushed Nickel CB Copper Bronze WT White |

Example: **HR-837-BK**

DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. For use with HR-800 series low voltage housings. Accepts MR16 LED or incandescent lamp 50W max, housing and lamp are sold separately.

FEATURES


- Accommodates most LED MR16 or Halogen MR16 lamps
- Retention clips secure lens firmly to lamp
- Clear lens included, replaceable lens options available
- 5 year warranty

SPECIFICATIONS


| | |
|-----------------|---|
| Construction: | 20 gauge steel |
| Light Source: | Halogen MR16, LED MR16 |
| Finish: | Electrostatically Powder Coated White, Electroplated Brushed Nickel, Black, Electroplated Copper Bronze |
| Operating Temp: | -4°F to 104°F (-20°C to 40°C) |
| Standards: | UL, cUL, Damp Location Listed |



FINISHES

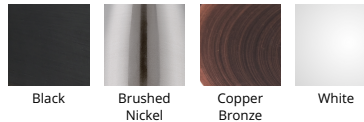

LINE DRAWING

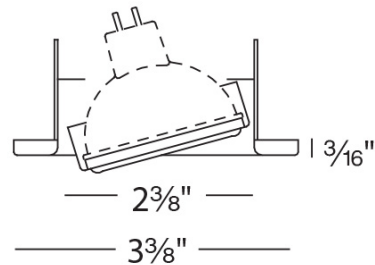

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Fixture Type: _____







Catalog Number: _____

Project: _____

Location: _____

2.5" Low Voltage Adjustable Trim

ACCESSORIES

| | <i>Model</i> | <i>Description</i> | <i>Finish</i> |
|---|--|--|---|
|  | LENS-16-AMB LENS-16-BLU LENS-16-GRN LENS-16-RED | <i>Colored Lens</i> <i>Colored Lens</i> <i>Colored Lens</i> <i>Colored Lens</i> | <i>Amber</i> <i>Blue</i> <i>Green</i> <i>Red</i> |
|  | LENS-16-FR | <i>Clear/Frosted Lens</i> | <i>Frosted</i> |
|  | LENS-16-SPR | <i>Spread Lens</i> | <i>Spread Lens</i> |
|  | LENS-16-UVF | <i>UV Filter lens</i> | <i>Clear</i> |
|  | LENS-16-BEL | <i>Beam Elongating Lens</i> | <i>Beam Elongating</i> |
|  | LENS-16-HCL | <i>Honeycomb Louver</i> | <i>Black</i> |

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

2.5" Low Voltage

Non-IC Housing for Cabinet Use

Model

HR-800 2.5in Under Cabinet
Remodel Housing

Example: **HR-800**

DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. May be used with any WAC compatible 2.5" HR-837, HR-834, or HR-836 trims.

FEATURES


- For cabinet use only
- Total depth of 4", one of the lowest profile recessed units available
- Low profile housing
- Transformer required
- 5 year warranty

SPECIFICATIONS

| | |
|---------------------------|--|
| Construction: | 20 gauge steel |
| Input: | 12 VAC, 50/60Hz |
| Light Source: | Halogen MR16 (Sold Separately) |
| Mounting: | No screws, nails or hardware required. Flat "wing" springs expand against the cut out hole to hold fixture against the surface |
| Cut Out: | 3" |
| Ceiling Thickness: | 3/4" |
| Operating Temp: | -4°F to 104°F (-20°C to 40°C) |
| Standards: | UL, cUL, Damp Location Listed, Non IC |



LINE DRAWING



WAC LIGHTING

2.5" Low Voltage

Remodel Non-IC Housing Non-IC

Model & Product

HR-801 2.5in Low Voltage Remodel Non-IC Housing

Example: **HR-801**

DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. May be used with any WAC compatible 2.5" HR-837, HR-834, or HR-836 trims.

FEATURES

- Integral Electronic Transformer
- Advanced auto-reset, soft start and short circuit protection
- 3" clearance on all sides when insulation is present
- Suitable for chain wiring
- J-box and transformer accessible through ceiling opening
- Transformer included
- 5 year warranty

SPECIFICATIONS

| | |
|--------------------|--|
| Construction: | 20 gauge steel |
| Power: | 50W |
| Input: | 120 VAC, 50/60Hz |
| Dimming: | ELV: 100-10% |
| Light Source: | Halogen MR16 (Sold Separately) |
| Mounting: | No screws, nails or hardware required. Flat "wing" springs expand against the cut out hole to hold fixture against the surface |
| Cut Out: | 3" |
| Ceiling Thickness: | 3/4" |
| Operating Temp: | -4°F to 104°F (-20°C to 40°C) |
| Standards: | UL, cUL, Damp Location Listed, Non IC |

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING

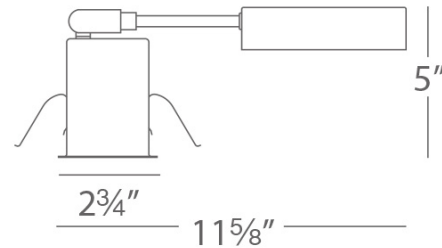

WAC LIGHTING

2.5" Low Voltage

New Construction Non-IC Housing

Model & Product

HR-802 2.5in Low Voltage New Construction Non-IC Housing

Example: **HR-802**

DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. May be used with any WAC compatible 2.5" HR-837, HR-834, or HR-836 trims.

FEATURES

- 3" clearance on all sides when insulation is present
- Total depth of 4", one of the lowest profile recessed units available
- Low profile housing
- Transformer included
- 5 year warranty

SPECIFICATIONS

| | |
|---------------------------|---|
| Construction: | 20 gauge steel |
| Power: | 50W |
| Input: | 120 VAC, 50/60Hz |
| Dimming: | ELV: 100-10% |
| Light Source: | Halogen MR16 |
| Mounting: | Supplied with hanger bars, adjustable from 15"-242" to accommodate various joist construction and grid sizes. |
| Cut Out: | 3" |
| Ceiling Thickness: | 3/4" |
| Operating Temp: | -4°F to 104°F (-20°C to 40°C) |
| Standards: | UL, cUL, Damp Location Listed, Non IC |

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING

