

KICHLER.

Collections

Breda	
Nani Weather+™	18
Brahm [™]	
Gentry	20
Ridley [™] II	28
Volos	
Lucian [™]	32
Accessories Fan Controls	
LED Light Kits	4





NEW

Breda

Welcome an element of tranquillity into modern style settings with the soft, light curvature and simple yet sculptural form of the Breda collection. Inspired by the trend of incorporating softness into all objects, Breda helps add an air of ultimate relaxation to any space.

Designed to complement

SCANDINAVIAN





84^{II} Breda





DC DC Motor



Wet-Rated

INCLUDED FEATURES

Blades (8) Included

- 4.5° Pitch
- 84" Sweep
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Optional LED Light Kits See page 44 or Kichler.com for additional options.

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch 22° Lead Wire 78" cETLus Listed Wet Hanging Weight 30.6 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC 165L Amps 0.43 on High RPM 72 on High

INCLUDED CONTROLS



6-Speed DC CoolTouch™ Transmitter - Full Function

- 6 Forward Speeds, Reverse & Motor Off
- Light On/Off with Full Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



6-Speed DC Wall Transmitter 370036 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Crosby Sconce 45495BK



Izza Sconce 83746



Kizette[™] Chandelier 84177

HANGING MEASUREMENTS


with 6" Downrod

A Fixture Drop from Ceiling 16.5"

B Blade Drop from Ceiling 15.5"

C Housing (Width) 8.25"

D Ceiling Canopy (Width) 5.5"



Fixture Drop (A) includes light kit

AIR PERFORMANCE Airflow Cubic Ft. Per Minute on High Power Usage Watts on High (Excludes Lights) Power Usage Cubic Ft. Per Minute Per Watt Power Usage Watts on High (Excludes Lights) Airflow Efficiency Cubic Ft. Per Minute Per Watt

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)
















75 Breda

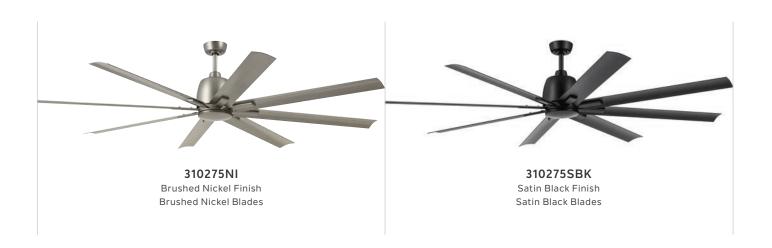



DC DC Motor



Wet-Rated

INCLUDED FEATURES

Blades (8) Included

- 4.5° Pitch
- 75" Sweep
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Optional LED Light Kits See page 44 or Kichler.com for additional options.

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch 22° Lead Wire 78" cETLus Listed Wet Hanging Weight 28.9 lbs. **Body Material** Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC 165L Amps 0.43 on High **RPM** 88 on High

INCLUDED CONTROLS



Transmitter - Full Function

- 6 Forward Speeds, Reverse & Motor Off
- Light On/Off with Full
- No More Than Two Fans

OPTIONAL CONTROLS



6-Speed DC Wall Transmitter 370036 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Dahlia Wall Light 49558BKLED


6-Speed DC CoolTouch™

- Range Dimming
- on One Circuit

HANGING MEASUREMENTS

with 6" Downrod 16.5" Fixture Drop from Ceiling 15.5" В Blade Drop from Ceiling С Housing (Width) 8.25" Ceiling Canopy (Width) 5.5"

Airflow Cubic Ft. Per Minute on High 9108



Fixture Drop (A) includes light kit

Watts on High (Excludes Lights) Cubic Ft. Per Minute Per Watt	Watts on High (Excludes Lights) (Tubic Et Per Minute Per Watt
--	---

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)
















65 Breda

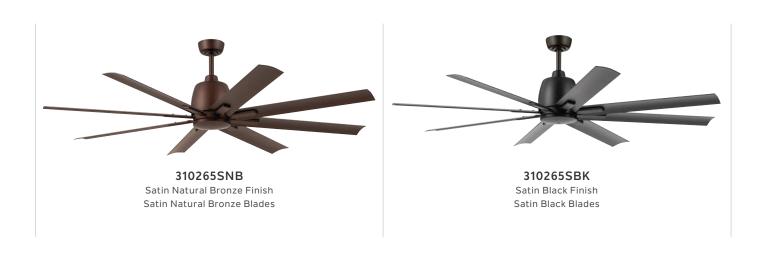



DC DC Motor



Wet-Rated

INCLUDED FEATURES

Blades (8) Included

- 4.5° Pitch
- 65" Sweep
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Optional LED Light Kits See page 44 or Kichler.com for additional options.

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch 22° Lead Wire 78" cETLus Listed Wet Hanging Weight 26.9 lbs. **Body Material** Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC 165L Amps 0.21 on High **RPM** 88 on High

INCLUDED CONTROLS



6-Speed DC CoolTouch™ Transmitter - Full Function

- 6 Forward Speeds, Reverse & Motor Off
- Light On/Off with Full Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



6-Speed DC Wall Transmitter 370036 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.





Horizon Downlight 43873WHLED27

Brettin Sconce 85090PN




Neltev[™] Sconce 83965 (Bronze)

HANGING MEASUREMENTS

		with 6" Downrod
Α	Fixture Drop from Ceiling	16.5"
В	Blade Drop from Ceiling	15.5"
С	Housing (Width)	8.25"
D	Ceiling Canopy (Width)	5.5"

Airflow

6226



Fixture Drop (A) includes light kit

AIR PERFORMANCE Airflow Efficiency Power Usage Cubic Ft. Per Minute on High Watts on High (Excludes Lights) Cubic Ft. Per Minute Per Watt 14 445

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)




















56 Almere

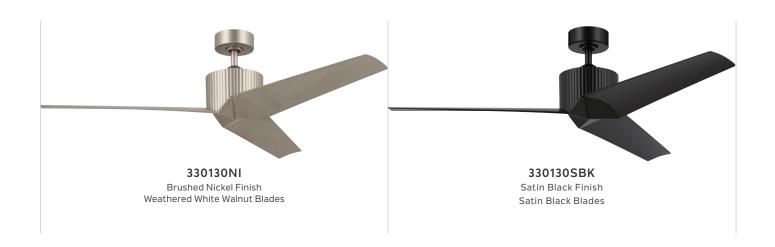



INCLUDED FEATURES

Blades (3) Included

- 4.3° Pitch
- 56" Sweep
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Optional LED Light Kits No

 $\textbf{Low Ceiling Adaptable} \ \mathsf{No}$

FAN FEATURES

Mounting Slope – Pitch 22° Lead Wire 78" cETLus Listed Dry Hanging Weight 17.2 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.51 on High RPM 133 on High

INCLUDED CONTROLS



65K Wall Control System – Limited Function

- 3 Forwards Speeds & Motor Off
- Manual Reverse
- Light On/Off with Full Range Dimming

OPTIONAL CONTROLS



65K CoolTouch™ Transmitter – Limited Function 370005 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.





Sylvia[™] Rail Light 52129BK

Ryame[™] Mirror 84169

HANGING MEASUREMENTS


with 4.5" Downrod

A Fixture Drop from Ceiling 13"

B Blade Drop from Ceiling 10.4"

C Housing (Width) 8.5"

D Ceiling Canopy (Width) 6"



Fixture Drop (A) includes light kit

AIR PERFORMANCE		
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5752	60.2	96

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)

















Weather+[™] Fans

For coastal environments.

Designed to withstand wet-rated weather conditions and combat the effect of certain environmental factors such as sun, rain, and saltwater spray. Weather+ ceiling fans are low-corrosion and UV fade-resistant, making these fans ideal for coastal areas.



Nani Weather+™

Inspired by the palm leaf, the Nani collection's ABS fan blades easily transform global settings into their own slice of paradise. Its broad blade sweep makes it ideal for medium-sized indoor or outdoor applications. As a Weather+ ceiling fan it can withstand wet-rated weather conditions plus combat the effects of certain environmental factors such as saltwater spray and impact from UV rays.

Designed to complement

TROPICALO





56 Nani Weather+™









INCLUDED FEATURES

Blades (5) Included

- 11.4° Pitch
- 56" Sweep
- ABS

Downrods 4.5" Downrod with 1" (O.D.)

Optional LED Light Kits See page 44 or Kichler.com for additional options.

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch 22° Lead Wire 78" cETLus Listed Wet Hanging Weight 22.3 lbs. **Body Material** Stainless Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.54 on High RPM 136 on High

INCLUDED CONTROLS

Pull Chain

- 3 Speeds
 - 3 Forward & Reverse
 - Manual Reverse

OPTIONAL CONTROLS



65K Wall Control System -Limited Function

371042 (Shown) 371082 337001

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.








Camillo™ Capanna™ 59082NBR 49924OZ

HANGING MEASUREMENTS

with 4.5" Downrod 13.25" Α Fixture Drop from Ceiling 10.25" В Blade Drop from Ceiling 8" С Housing (Width) Ceiling Canopy (Width) 6.25"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4298	64	67

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)













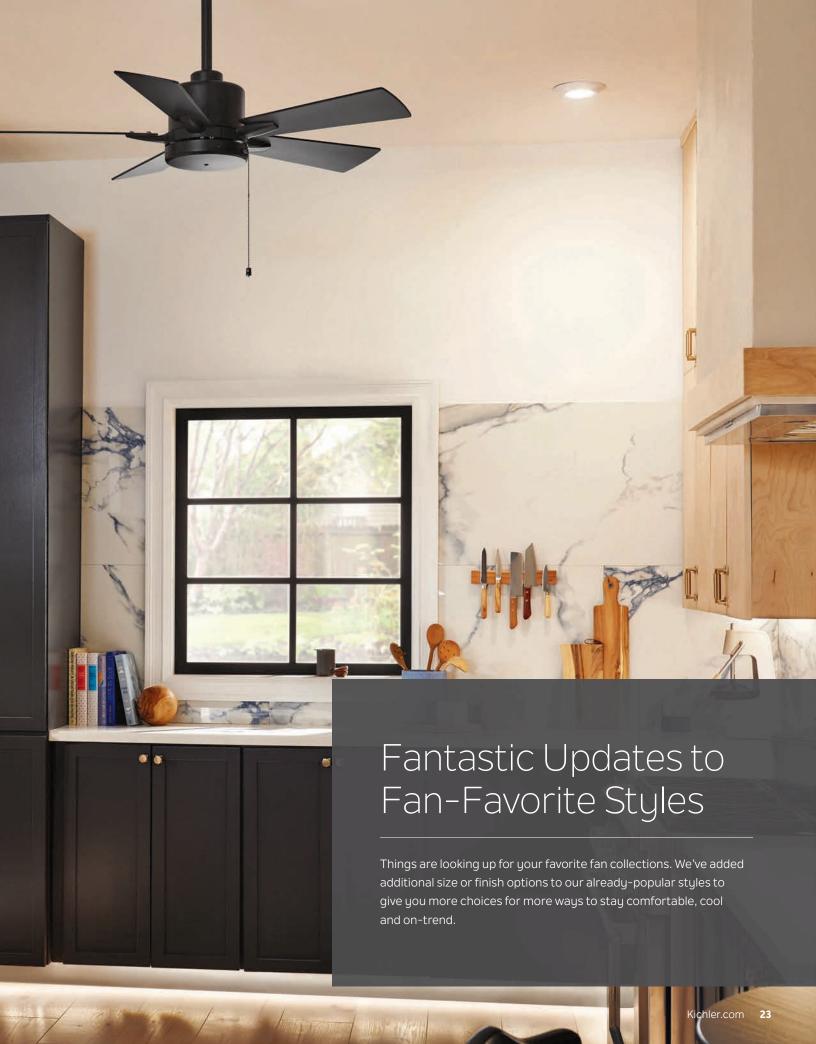



48 Brahm

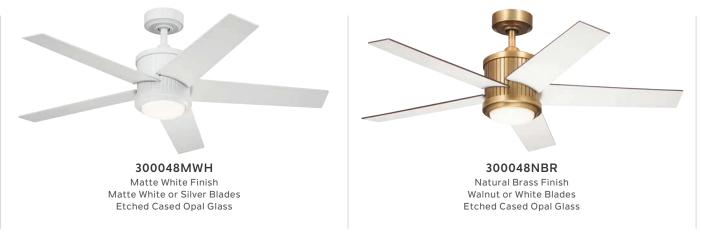





(LED) Integrated LED





Dimmable



INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 48" Sweep
- Reversible
- Plywood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W

- 1400 Source Lumens
- 90 CRI
- 3000K

Downlight Glass Etched Cased Opal Optional LED Light Kits No Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch 22° Lead Wire 78" **cETLus Listed** Dry Hanging Weight 16.7 lbs. **Body Material** Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.46 on High RPM 185 on High

INCLUDED CONTROLS



65K CoolTouch™ Control System -**Full Function**

- 3 Forward Speeds, Reverse & Motor Off
- Light On/Off with Full Range Dimming

OPTIONAL CONTROLS



65K Wall Transmitter -**Full Function** 371065 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Kimrose™ Sconce 52415PN



Tolani™ Chandelier 52427BNB

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)


























HANGING MEASUREMENTS

		with 4.5" Downrod	
Α	Fixture Drop from Ceiling	15.5"	
В	Blade Drop from Ceiling	10.5"	
С	Housing (Width)	8.25"	
D	Ceiling Canopy (Width)	6"	



Fixture Drop (A) includes light kit

Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4077	54	76





60 Gentry



Distressed Black Finish
Walnut or Walnut Shadowed Blades
Etched Cased Opal Glass



300260WZC Weathered Zinc Finish Weathered White Walnut or Dark Walnut Blades Etched Cased Opal Glass



Integrated LED



Dimmable



Reversible Blades



Damp-rated



DC Motor

INCLUDED FEATURES

Blades (9) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Plywood

Downrods 6" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W

- 1600 Source Lumens
- 80 CRI
- 3000K

Downlight Glass Etched Cased Opal **Optional LED Light Kits** No **Low Ceiling Adaptable** No

FAN FEATURES

Mounting Slope – Pitch 30° Lead Wire 78" cULus Listed Damp

Hanging Weight 26.9 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC155mmX22mm Amps 0.51 on High RPM 135 on High

INCLUDED CONTROLS



6-Speed DC Wall Transmitter

- 6 Forward Speeds, Reverse & Motor Off
- Light On/Off with Full Range Dimming
- No More Than Two Fans on One Circuit
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



6-Speed DC CoolTouch™ Transmitter – Full Function 371075 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Dame Pendant 52474AVI



Freesia Chandelier 52455AVI

HANGING MEASUREMENTS


with 6" Downrod

A Fixture Drop from Ceiling 16.75"

B Blade Drop from Ceiling 14"

C Housing (Width) 7"

D Ceiling Canopy (Width) 6"



Fixture Drop (A) includes light kit

AIR PERFORMANCE Airflow Power Usage Airflow Efficiency Cubic Ft. Per Minute on High Watts on High (Excludes Lights) Cubic Ft. Per Minute Per Watt 7456 34 219

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)























Ridley[™] II







(LED) Integrated LED





Dimmable

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-Reversible
- Carved Wood

Downrods 4.5" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W

- 1600 Source Lumens
- 80 CRI
- 3000K

Downlight Glass Etched Cased Opal Optional LED Light Kits No Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch 30° Lead Wire 78" cETLus Listed Dry Hanging Weight 17.2 lbs. **Body Material** Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC Amps 0.48 on High RPM 127 on High

INCLUDED CONTROLS



Wall Transmitter -**Limited Function**

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Light On/Off with Full Range Dimming

OPTIONAL CONTROLS



CoolTouch™ Transmitter -**Limited Function** 337214 (Shown) 371042 371082

METAL CAPS

Includes a metal fixture cap for non-light use.









BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)


















HANGING MEASUREMENTS

		with 4.5" Downrod	
Α	Fixture Drop from Ceiling	14.75"	
В	Blade Drop from Ceiling	13.25"	
С	Housing (Width)	7"	
D	Ceiling Canopu (Width)	5.25"	



Fixture Drop (A) includes light kit

Airflow	AIR PERFORMANCE Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4945	57	87











Integrated LED





Dimmable

INCLUDED FEATURES

Blades (3) Included

- Variable Pitch 0°-15°
- 54" Sweep
- Non-Reversible
- ABS

Downrods N/A

Downlight Integrated LED (1) 17W

- 1400 Source Lumens
- 90 CRI
- 3000K

Downlight Lens Frosted White Polycarbonate

Optional LED Light Kits No Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope – Pitch N/A Lead Wire 12" cETLus Listed Dry Hanging Weight 16 lbs. Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.51 on High RPM 177 on High

INCLUDED CONTROLS



65K Wall Control System -Full Function

- 3 Forward Speeds, Reverse & Motor Off
- Light On/Off with Full Range Dimming
- Faceplates Included in 3 Colors

OPTIONAL CONTROLS



65K CoolTouch™ Transmitter-Full Function 370006 (Shown)

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)

Matte White FB300154 MWH
















HANGING MEASUREMENTS

Α	Fixture Drop from Ceiling	10.4"
В	Blade Drop from Ceiling	7.75"
С	Housing (Width)	8"
D	Ceiling Canopu (Width)	8"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
4247	61	70









Integrated LED





Dimmable



INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Integrated LED (1) 17W

- 1600 Source Lumens
- 80 CRI
- 3000K

Downlight Glass Etched Cased Opal **Optional LED Light Kits** No **Low Ceiling Adaptable** No

FAN FEATURES

Mounting Slope – Pitch 18° Lead Wire 78" cETLus Listed Dry Hanging Weight 19.7 lbs. Body Material Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC Amps 0.74 on High RPM 128 on High

INCLUDED CONTROLS



Wall Transmitter -Limited Function

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Light On/Off with Full Range Dimming

OPTIONAL CONTROLS



CoolTouch™ Transmitter -Limited Function 337214 (Shown) 371042 371082

METAL CAPS

Includes a metal fixture cap for non-light use.









BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)


























HANGING MEASUREMENTS

		with 4" Downrod	
Α	Fixture Drop from Ceiling	14.25"	
В	Blade Drop from Ceiling	9.75"	
С	Housing (Width)	7.5"	
D	Ceiling Canopy (Width)	5.25"	



Fixture Drop (A) includes light kit


AIR PERFORMANCE

Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
5849	85	68





60" Lucian" II*

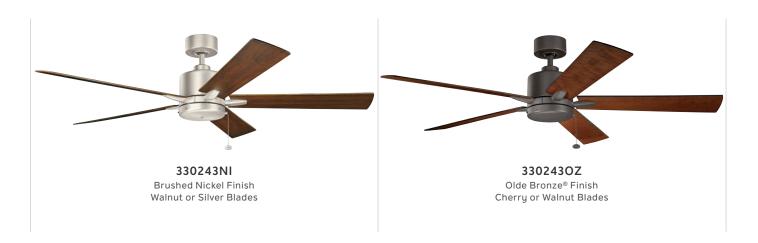



*Formerly known as the Bowen Collection



AC AC Motor



Reversible Blades

INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible; Finish Dependent
- Wood

Downrods 4.5" Downrod with 1" (O.D.)

Optional LED Light Kits See page 44

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cULus Listed Dry

Hanging Weight 27.5 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC Amps 0.57 on High RPM 111 on High

INCLUDED CONTROLS

Pull Chain



- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS



65K Wall Control System -Limited Function

371042 (Shown) 371082 337001

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Calters Linear Chandelier 52293BKLED

Clevo™ Pendant 84095MBK




Ryame[™] Mirror 84172

HANGING MEASUREMENTS

with 4.5" Downrod

Α	Fixture Drop from Ceiling	14"
В	Blade Drop from Ceiling	11.25"
С	Housing (Width)	8.25"
D	Ceiling Canopy (Width)	5.25"



Fixture Drop (A) includes light kit

AIR PERFORMANCE

Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
5208	65	

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)

























52^{11} Lucian 11



PRODUCT FEATURES



AC AC Motor



INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible; Finish Dependent

В

С

Housing (Width) Ceiling Canopy (Width)

Downrods 4.5" Downrod with 1" (O.D.) Optional LED Light Kits See page 44

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch 18° Lead Wire 78" **cULus Listed** Dry Hanging Weight 16.0875 lbs. **Body Material** Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC Amps 0.55 on High RPM 159 on High

INCLUDED CONTROLS

Pull Chain



- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS



65K Wall Control System -**Limited Function** 371042 (Shown)

371082 337001

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Calters Linear Chandelier 52293BKLED

Clevo" Pendant 84095MBK




Ryame™ Mirror 84172

HANGING MEASUREMENTS

	with 4.5" Downrod
Fixture Drop from Ceiling	13.5"
Blade Drop from Ceiling	10.75"
Housing (Width)	7.5"

5.25"



Fixture Drop (A) includes light kit

AIR PERFORMANCE Airflow Efficiency Airflow Power Usage Cubic Ft. Per Minute on High Watts on High (Excludes Lights) Cubic Ft. Per Minute Per Watt 5061 66 77

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)

























42" Lucian™ II*



PRODUCT FEATURES



AC AC Motor



INCLUDED FEATURES

Blades (5) Included

- 14° Pitch
- 42" Sweep
- Reversible; Finish Dependent

Downrods 4.5" Downrod with 1" (O.D.) Optional LED Light Kits See page 44

Low Ceiling Adaptable No

FAN FEATURES

Mounting Slope - Pitch 18° Lead Wire 78" **cULus Listed** Dry Hanging Weight 14.775 lbs. **Body Material** Steel Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC Amps 0.41 on High RPM 199 on High

Fixture Drop from Ceiling

Blade Drop from Ceiling

Housing (Width) Ceiling Canopy (Width)

В

С

INCLUDED CONTROLS

Pull Chain



- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse

OPTIONAL CONTROLS



65K Wall Control System -**Limited Function** 371042 (Shown)

371082 337001

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Calters Linear Chandelier 52293BKLED

Clevo" Pendant 84095MBK




Ryame™ Mirror 84172

HANGING MEASUREMENTS

with 4.5" Downrod	
13.5"	
10.75"	
7.5"	

5.25"



Fixture Drop (A) includes light kit

	AIR PERFORMANCE	
Airflow Cubic Ft. Per Minute on High	Power Usage Watts on High (Excludes Lights)	Airflow Efficiency Cubic Ft. Per Minute Per Watt
3810	47	80

BLADE SPECS

Blade Finish & Part Number Fan Motor Finish (Side 1) (Reversible)

























DC Control Transmitter - Full Function

Designed for DC motor fans only. **Dry-rated transmitter.**



6-Speed DC CoolTouch™ Transmitter Full Function

371075WHTR

- 65K Frequency Options
- 6 Forward Speeds, Reverse, and Motor Off.
- Lights on/off with full-range dimming (including LED light sources).
- Includes White faceplate and mounting hardware. No more than 2 fans on one circuit.

Optional Accessories:

370010IV CoolTouch Wallplate in Ivory (IV) **370011IV**, **WH** CoolTouch Dual Gang Wallplate in Ivory (IV) or White (WH)




6-Speed DC Wall Transmitter Full Function

370036 IVTR, WHTR (shown)

- 65K Frequency Options
- 6 Forward Speeds, Reverse, and Motor Off.
- Lights on/off with full-range dimming (including LED light sources).
- Includes Ivory or White faceplate and mounting hardware. No more than 2 fans on one circuit.
- Hard-wired wall control.

AC Control Systems - Full Function



Designed for AC motor fans. Includes transmitter and receiver. 65K Frequency Options. Dry-rated transmitter, Wet-rated receiver.



CoolTouch™ Handheld Control System **Full Function**

371085 ALM, IV, WH (shown)

- 65K Frequency Options
- · 3 Forward Speeds, Reverse, and Motor Off.
- · Lights on/off with full-range dimming (including LED light sources). On/off only for
- Wireless radio frequency operational radius of 30' or less.
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries.



Wall Control System

Full Function

371045MUL (ALM, IV & WH)

- 65K Frequency Options
- 3 Forward Speeds, Reverse, and Motor Off.
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.



- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware.
- · Hard-wired wall control.



Optional Wall Transmitter*: 371065MULTR

Includes Almond (ALM), Ivory (IV), and White (WH)





Optional Remote Transmitter*: 370006WHTR

65K CoolTouch™ Transmitter - Full Function White (WH)

*Dry-rated transmitter

AC Control Systems - Limited Function



Designed for AC motor fans. Includes transmitter and receiver. 65K Frequency Options. Dry-rated transmitter, Wet-rated receiver.



CoolTouch™ Handheld Control System Limited Function

371082WH

- 65K Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse.
- · Lights on/off with full-range dimming (including LED light sources). On/off only for



- Wireless radio frequency operational radius of 30' or less.
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries.



Wall Control System

Limited Function

371042MUL (ALM, IV & WH)

- 65K Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse.
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.



- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware.
- · Hard-wired wall control.



Optional Wall Transmitter*: 371062MULTR

65K Wall Transmitter - Limited Function Includes Almond (ALM), Ivory (IV), and White (WH)



Optional Remote Transmitter*: 370005WHTR

65K CoolTouch™ Transmitter - Limited Function White (WH)

^{*}Dry-rated transmitter

AC Control Systems - Basic Function

Designed for AC motor fans. Includes dry-rated transmitter and receiver. 16 Frequency Options.





Handheld Control Sustem

Basic Function

337001WH

- 16 Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse.
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent. Not recommended for LED light kits.
- Includes transmitter and canopy-mounted receiver with 16 possible frequencies. Also includes wall bracket and mounting hardware, plus 9-volt battery.



Upgrade - Wall Transmitter: 370039MULTR

16 Frequency Options Wall Transmitter - Limited Function Includes Almond (ALM), Ivory (IV), and White (WH) wall and cover plates Dry-rated for indoor use only.

AC Control Transmitters

Designed for AC motor fans. 16 Frequency Options.



CoolTouch™ Transmitter

337009WHTR (WH)





Full Function

Wall Transmitter 370038MULTR (ALM, IV & WH)

- · 16 Frequency Options
- 3 Forward Speeds, Reverse, Motor Off.
- · Lights on/off with full-range dimming.
- Transmitter works with existing system. Wireless operational
- plate, plus mounting hardware.
- Dry-rated for indoor use.

radius of 30' or less. • Includes White wall and cover

Optional Accessory: 370010 IV CoolTouch Ivory (IV) Wallplate

- · 16 Frequency Options
- 3 Forward Speeds, Reverse, Motor Off.
- · Lights on/off with full-range dimming.
- Transmitter works with existing system. Wireless operational radius of 30' or less.
- Includes White, Ivory, and Almond switch and cover plates, plus mounting hardware.
- Hard-wired wall control. No batteries needed.
- Dry-rated for indoor use.



Limited Function

CoolTouch™ Transmitter 337214TR (WH)

- 16 Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse.
- · Lights on/off with full-range dimming.
- Transmitter works with existing system. Wireless operational radius of 30' or less.
- Includes White wall and cover plate, plus mounting hardware.

370010IV CoolTouch Ivory (IV)

• Dry-rated for indoor use.

Optional Accessory:

Wall Transmitter **370039MULTR** (ALM, IV & WH)

- 16 Frequency Options
- 3 Forward Speeds, Motor Off, Manual Reverse.
- Lights on/off with full-range dimming.
- Transmitter works with existing system. Wireless operational radius of 30' or less.
- · Includes White, Ivory, and Almond switch and cover plates, plus mounting hardware.
- Hard-wired wall control. No batteries needed.
- Dry-rated for indoor use.

CoolTouch™ Accessories



Single Gang CoolTouch™ Wallplate Works with any AC or DC CoolTouch™ Control System



Wallplate

370011 IV, WH (shown) Dual Gang CoolTouch™ Wallplate Works with any AC or DC CoolTouch™ Control System

Slope Adapter



337005 (Multiple Finishes Available) 60°Slope Adapter | 6"Dia. x 4"H

- Adapts to sloped or vaulted ceilings from 0° to 60°
- Accepts our CoolTouch™ Receiver Unit for remote controlled fans
- Includes "Stabilized" Mounting System with tension feature
- Safety features prevent fan from "lifting" off mounting system
- Heavy-duty design features 2 safety pins and 1 screw set for maximum safety
- Designed for indoor or outdoor use. Outdoor finishes are powder coated or painted with a galvanized undercoating
- Designed for use with 1" O.D. downrods ONLY
- Available in all Kichler® fan finishes
- Downrod sold separately
- U.S. Patent Pending







All Kichler® ceiling fans come standard with our universal hanging system. This basic system allows for mounting on ceilings with up to a 30° slope. For ceilings in excess of 30° of slope, please utilize our 60° Slope Adapter (337005).

Recommended for fan stability in high wind applications. (For any slope or flat ceiling)

Dual-Threaded Downrods

1" O.D. extension downrods.

	Ceiling Height	9 ft.	10 ft.	11 ft.	12 ft.	13 ft.	14 ft.	15 ft. +
	Downrod Size	12"	18"	24"	36"	48"	60"	72"
	Finishes							
-	AP	360000	360001	360002	360003	360004	360005	360006
	Antique Pewter	AP						
•	AVI	360000	360001	360002	360003	360004	360005	360006
	Anvil Iron	AVI						
	BSS	360000	360001	360002	360003	360004	360005	360006
	Brushed Stainless Steel	BSS						
	DBK	360000	360001	360002	360003	360004	360005	360006
	Distressed Black	DBK						
	MWH	360000	360001	360002	360003	360004	360005	360006
	Matte White	MWH						
•	NBR	360000	360001	360002	360003	360004	360005	360006
	Natural Brass	NBR						
•	NI	360000	360001	360002	360003	360004	360005	360006
	Brushed Nickel	NI						
* •	OBB	360000	360001	360002	360003	360004	360005	360006
	Oil Brushed Bronze [™]	OBB						
	OZ	360000	360001	360002	360003	360004	360005	360006
	Olde Bronze [®]	OZ						
	PN	360000	360001	360002	360003	360004	360005	360006
	Polished Nickel	PN						
•	SBK	360000	360001	360002	360003	360004	360005	360006
	Satin Black	SBK						
	SNB	360000	360001	360002	360003	360004	360005	360006
	Satin Natural Bronze	SNB						
	WZC	360000	360001	360002	360003	360004	360005	360006
	Weathered Zinc	WZC						

For a complete list of all available finishes, please visit Kichler.com

LED Light Kits

All universal light kits are correlated color temperature (CCT) selectable with values of 3000K & 5000K, and coordinate with any fan finish.

9" Universal LED Light Kit - Squared Dome

380940WH

Diffuser	Satin Etched Cased Opal Polycarbonate	
Downlight	25.5W Dimmable Integrated LED 1,900 Im 90 CRI CCT selectable 3000K/5000K	
Dimensions	8.75" Diameter 3.5" Height	
cETLus Listed	Damp	

9" Universal LED Light Kit – Rounded Dome

380941WH

Diffuser	Satin Etched Cased Opal Polycarbonate	
Downlight	 25.5W Dimmable Integrated LED 1,900 Im 90 CRI CCT selectable 3000K/5000K 	
Dimensions	8.75" Diameter 3.5" Height	
cETLus Listed	Damp	À

10" Universal LED Light Kit – Squared Dome

380960WH

Diffuser	Satin Etched Cased Opal Polycarbonate	
Downlight	• 34W Dimmable Integrated LED • 2,600 lm • 90 CRI • CCT selectable 3000K/5000K	
Dimensions	10" Diameter 3.5" Height	, , , , , ,
cETLus Listed	Damp	Ò

10" Universal LED Light Kit – Rounded Dome

380961WH

Diffuser	Satin Etched Cased Opal Polycarbonate	
Downlight	• 34W Dimmable Integrated LED • 2,600 Im • 90 CRI • CCT selectable 3000K/5000K	
Dimensions	10" Diameter 3.5" Height	
cETLus Listed	Damp	

14" Universal LED Light Kit – Squared Dome

380980WH

Diffuser	Satin Etched Cased Opal Polycarbonate	
Downlight	• 38W Dimmable Integrated LED • 3,100 lm • 90 CRI • CCT selectable 3000K/5000K	
Dimensions	14" Diameter 4.5" Height	Ů
cETLus Listed	Damp	(ED) (D)

14" Universal LED Light Kit – Rounded Dome

380981WH

	3809	81WH
Diffuser	Satin Etched Cased Opal Polycarbonate	
Downlight	• 38W Dimmable Integrated LED • 3,100 lm • 90 CRI • CCT selectable 3000K/5000K	
Dimensions	14" Diameter 4.5" Height	
cETLus Listed	Damp	



LIGHTING & FANS BY -

KICHLER®

A PROUD NATIONAL SPONSOR -



St. Jude Dream Home® Giveaway



Symbol Guide & Notes



Integrated LED



Dimmable



AC Motor



DC Motor



Reversible Blades



Energy Star®



Damp-rated



Wet-rated



Weather+™



Federal Communications Commission devices designated with this logo comply with part 15 of the FCC Rules

Notes

- Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs.
 Some recommended lamps are not available in the maximum allowable wattage.
- All electrical products are rated as 120-volt, AC unless otherwise noted.
- All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S.A. and Canada except where noted.
- All products featured in the outdoor section are certified and listed to UL/CSA/ETL standards for wet location except where noted.
- On some products, in order to accommodate higher-than-normal ceiling height, extra lead wire is supplied and specified. With additional sections of chain or stems (not included), this allows an added measure of design flexibility.
- Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants, and other forms of weathering.
- To serve you better, Kichler Lighting reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed.

Consumer Notice

Federal Legislation to phase out 100 watt incandescent bulbs started January 2012.

The federal government enacted the Energy Independence and Security Act of 2007 in December 2007, requiring all general-purpose light bulbs that produce 310–2600 lumens of light be 30% more energy efficient (similar to current halogen lamps) than current incandescent bulbs by 2014. The efficiency standards started with 100 watt bulbs in January 2012 and will end with 40 watt bulbs in January 2014.

Light bulbs outside of this range are exempt from the restrictions (historically, less than 40 watts or more than 150 watts). Also exempt are several classes of specialty lights, including appliance lamps, rough service bulbs, 3-way, colored lamps and plant lights.

In 2020, a second tier of restrictions will become effective; which requires all general-purpose bulbs to produce at least 45 lumens per watt (similar to current CFLs). Exempt from the Act are reflector flood, 3-way, candelabra, colored and other specialty bulbs.

Many governments worldwide have passed measures to prohibit the sale of incandescent light bulbs for general lighting. The aim is to encourage use of more energy-efficient lighting alternatives, such as compact fluorescent lamps (CFLs) and LED lamps.

References: www.energy.senate.gov

We go to great lengths to assure the metal and glass finishes shown in the catalog match the actual products, but printing variations and variations in chemical finishes and the nature of hand-applied finishing will cause some differences between the printed images and actual product, and from one product to another.

We use only non-ferrous materials on the exterior parts of our outdoor lantern products, and use the best available weather-resistant finishes. However, due to some extreme environmental conditions such as acid rain, salt air and ultraviolet exposure, we cannot guarantee our exterior finishes, with the exception of our LifeBrite" fixtures.







All electrical products are UL/CSA/ or ETL Listed and Certified to UL/CSA Standards for use in U.S.A. and Canada except where noted.



Kichler is a member of the American Lighting Association (ALA), a trade association representing the residential lighting and ceiling fan industries in the United States and Canada. Its membership includes leading lighting and fan manufacturers, showrooms (retailers), manufacturers representatives and designers. ALA members are dedicated to providing the public with the proper application of quality residential lighting.

For warranty information visit Kichler.com/Warranty



Product Technical Support

To take advantage of this free service, call our dedicated technical support line at 844-KICHLER (844-542-4537) or email techsupport@kichler.com.

Abbreviation Key

AC	Alternating Current
ADA	Americans with Disabilities Act
ALM	Almond
Amp	Amperage
CCT	Color Temperature
CFM	Cubic Feet Per Minute
CLR	Clear
CRI	Color Rendering Index
D	
dB	Decibel
DC	Direct Current
Dia	Diameter
Ft	Feet
GA	Gauge
H	Height
hrs	Hours
I.D	Inside Diameter
IV	Ivory
Κ	Kelvin temperature
L	Length
LED	Light Emitting Diode
lm	Lumens
lm/W	Lumens per Watt
Max	Maximum
mm	Millimeter
MUL	Multiple Finishes
N/A	Not Applicable
NPSM	National Pipe & Thread - Straight, Male
O.D	Outside Diameter
RPM	Revolutions Per Minute
Sq. Ft	Square Feet
V	Volt
VA	Volt-Amp
W	Watt, when directly next to a number
W	Width, when paired with L and/or H
Thd	Thread



CONNECT WITH US













instagram.com/KichlerLighting facebook.com/Kichler.Lighting twitter.com/KichlerLight houzz.com/pro/KichlerLighting/Kichler pinterest.com/KichlerStyle youtube.com/KichlerLighting linkedin.com/company/KichlerLighting

Kichler Lighting LLC 30455 Solon Rd. Solon, Ohio 44139 Kichler.com

To find an Authorized Dealer, visit Kichler.com/Where-to-buy



OUR VISION

At Kichler Lighting, everything we do, every single day, is with the intention offcreating and delivering products that allow people to see what matters most to them. We will do that by relentlessly pursuing quality, ensuring continued innovation, always going one step further in our commitment to exceptional customer service and education, as well as creating on-trend designs that are both stylish and "life-stylish," promising to deliver project success for you.

Get inspired at Kichler.com

