shown in Black with Wood blade



Brisa 2000

Designed in 2000


Like satellites orbiting a planet, the Brisa's select mahogany blade head and lunar counterweight gently revolve 360° about its spherical gear housing. The fan head can be infinitely positioned in a 180-degree arc for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Brisa carries a limited lifetime warranty.



| Shown in Polished Copper with wood blades Characteristic Copper with wood blades Characteristic Copper Special Order Characteristic Copper Characteristic Copper Characteristic Copper Characteristic Copper Special Order Special Order Characteristic Copper Characteristic Copper Character | ZZT N RBR RCP B R | |
|---|--|--|
| Shown in Brushed | ZZT N RBR RCP B R RDAMP NDAMP /H TBLUE TPURPLE KN | |
| Sku# B2K-XXXXX-XXX (Model+Finish+Blade) Sku# Black Br Bronzette B2 Br Brushed Nickel BN Brushed Copper Br Polished Copper Br Brushed Copper Br Brushed Copper Br Brushed Copper Br Polished Copper Br Brushed Chrome CF Polished Chrome CF Brushed Nickel Damp Br Gloss White W Agua Marinha LT Black Nickel Br Brack Black Br Brack Black Br Brack Black Br Black Nickel Br | ZZT N RBR RCP B R RDAMP NDAMP /H TBLUE TPURPLE KN | |
| Standard Finishes Black Bronzette Bronzette B | ZZT N RBR RCP B R RDAMP NDAMP /H TBLUE TPURPLE KN | |
| shown in Polished Copper with wood blades with wood blades Fan Blade Solid Mahogany Wood Blade Mickel Safety cage Solid Mahogany Wood Blade Mickel Safety cage Solid Mahogany Wood Blade Mickel Safety cage Solid Mahogany Wood Blade Mickel Safety cage Solid Mahogany Wood Blade Mickel Solid Mahogany Mickel Soli | RCP B R P RDAMP NDAMP /H TBLUE TPURPLE KN | |
| Nickel with metal blades in safety cage Fan Blade Wood Blade Mickel Wood Blade Mickel Wood Blade <td>OLD ED LUE</td> | OLD ED LUE | |
| Sarety cage TECHNICAL SPECS Fan Weight 21 lbs | /D | |
| | | |
| Voltage 110 or 220 | | |
| | | |
| Motor Type AC | | |
| Rotation Yes | | |
| Downrods Lengths Field cuttable. Non-threaded inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 1 | | |
| Downrod Diameter .75 inch | | |
| Overall Drop 10 inches / 25 cm + downroo | d length | |
| shown in Bronzette with wood blades Environment Environment Damp location with protect powder or clear coat only. N coastal, saltwater nor chloric compatible. | Neither | |
| Ambience Soothing White Noise | | |
| Safety Certification UL / CUL | | |
| Warranty Limited Lifetime | | |
| shown in PART NEW JAN 21, 2020 DOE MOTOR EFFICIENCY | 20 DOE MOTOR EFFICIENCY DATA | |
| Black with metal blades in safety cage Wetal with the safety cage Wetal wit | th Guard | |
| Fan Diameter 40 inches / 102 cm 39 inches | | |
| Fan Blade Diameter 16 inches/41 cm 13 inches | s / 33 cm | |
| Guard Options No Cage Option Decorative or Safety with tight | y Cage | |
| RPM (Low / High) 866 / 1336 790 / 120 | 05 | |
| CFM (Low / High) 1602 / 2376 790 / 126 | 65 | |
| Watts (High) 52.44 55.15 | | |
| Shown in Bronzette with metal | | |
| blades in safety cage Blade Pitch 19* 31* | | |
| STANDARD EQUIPMENT | | |
| One downrod of 10 inches / 25 cm | 0 | |
| Flat ceiling canopy | \cap | |
| Decora-style, 3-speed wall control in white | | |
| OPTIONAL EQUIPMENT | | |
| 29° vaulted ceiling mount and canopy | | |
| Special Order Finishes NOTE: *Unipack Shipping for Wood Blades or | niy | |
| Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira Standard Finishes | | |
| Brushed BrassPolished CopperPolished CopperPolished ChromePolished ChromeBrushed Nickel DampBrushed Nickel DampGloss WhiteMatte BlackBronzette (Powdercoat)Brushed Nickel | | |

Brisa 2000

TECHNICAL SPECIFICATIONS

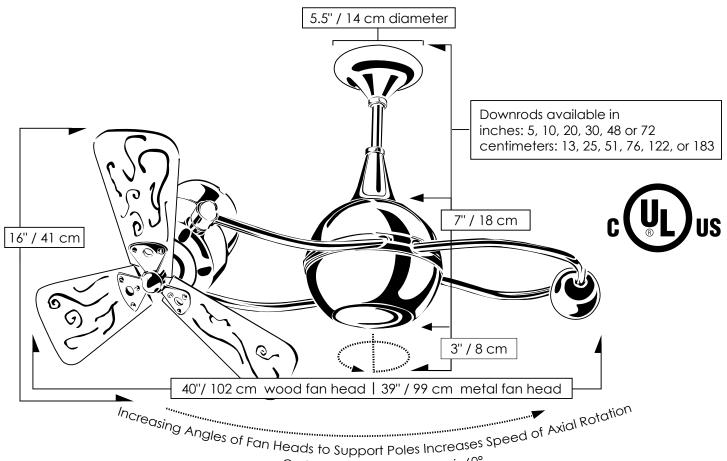

Optimum Fan Head Position is 60°

| CEILING PITCH TABLE | | |
|---------------------|---------------|--|
| 0/12 | 0 degrees | |
| 1/12 | 4.76 degrees | |
| 2/12 | 9.46 degrees | |
| 3/12 | 14.04 degrees | |
| 4/12 | 18.43 degrees | |
| 5/12 | 22.62 degrees | |
| 6/12 | 26.57 degrees | |
| 7/12 | 30.26 degrees | |
| 8/12 | 33.69 degrees | |
| 9/12 | 36.87 degrees | |
| 10/12 | 39.81 degrees | |
| 11/12 | 42.51 degrees | |

| CEILING HEIGHT / DOWNROD TABLE | | |
|-----------------------------------|--|--|
| Ceiling Height | Downrod Lengths Field cuttable. Non-threaded | |
| 10 ft or less | 5 inches / 13 cm Use safety cages if applicable | |
| 10 -12 feet | 10 inches / 25 cm | |
| 13 feet | 20 inches / 51 cm | |
| 14 feet | 30 inches / 76 cm | |
| 15 feet | 48 inches / 122 cm | |
| 16 feet + | 72 inches / 183 cm | |

Matthews Fan Company 1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com © 2023 Matthews Fan Company. All rights reserved.

