LED Wall mount










This LED sconce can be installed in different directions, allowing for greater flexibility for your projects. With 3 finishes to choose from, the choice is yours!

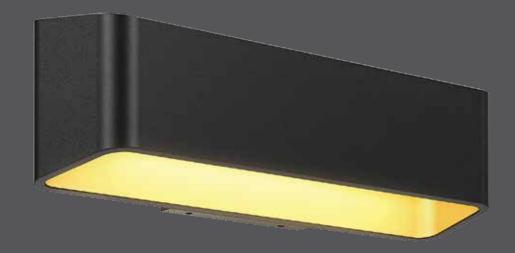

Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDWALL-F	16 W	800 lm	1140 lm	90	3000 K	120 V

Specifications

Made of extruded aluminum

Over 50,000 hours of service life

Fully sealed light engine

Up and down lighting

Warm white light output

Low power consumption

Superior color consistency

Integrated dimmable driver

ADA compliant

JA8 certified

Suitable for wet locations

Refer to website for dimmer compatibility

Ideal operating temperature:

-20° to 40° C

5-year warranty

Finish

BK/GD Black, gold interior

SG Silver greyWH White

Order example

LEDWALL-F-BK/GD LEDWALL-F wall mount in a black finish with gold interior

Note

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

LEDWALL-F

