


ASSEMBLY INSTRUCTIONS

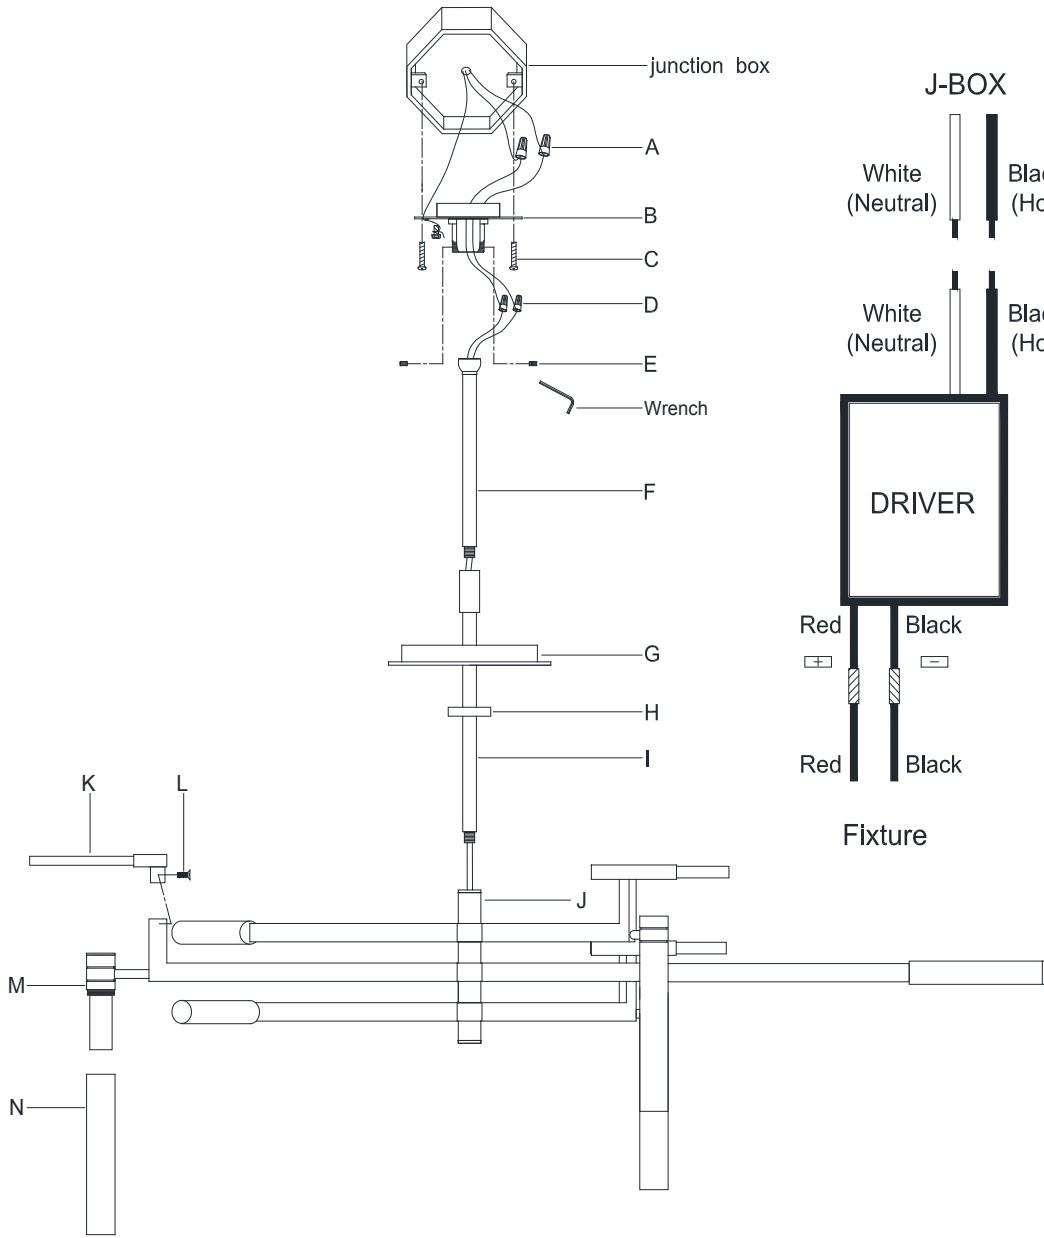

Melange Large Floating Disc Chandelier

Item # KW 5602

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Feed the fixture wire and ground wire pass through the rod (I), then thread the rod (I) to the top of fixture body (J).
3. Feed the fixture wire and ground wire pass through the collar ring (H) and canopy (G) and rod (F). Then thread the rod (F) to the rod (I).
4. Wrap the ground wire from the junction box to the green screw on the mounting plate (B) and secure with screwdriver.


IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

5. Connect the driver Neutral wire (white) with the neutral wire (White) from the junction box using wire nut (A).
6. Connect the driver Hot wire (black) with the hot wire (Black) from the junction box using wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

7. Tuck these wire connections neatly into the outlet box.
8. Install the mounting plate (B) to the junction box with mounting screws (C) provided.
9. Hang the rod (F) with swivel ball on the mounting plate (B) and seucre with set screws (E) by using the wrench.
10. Connect the fixture neutral wire (black) with the driver neutral wire (black) using the small wire nut (D).
11. Connect the fixture hot wire (red) with the driver hot wire (red) using the small wire nut (D).

ASSEMBLY INSTRUCTIONS

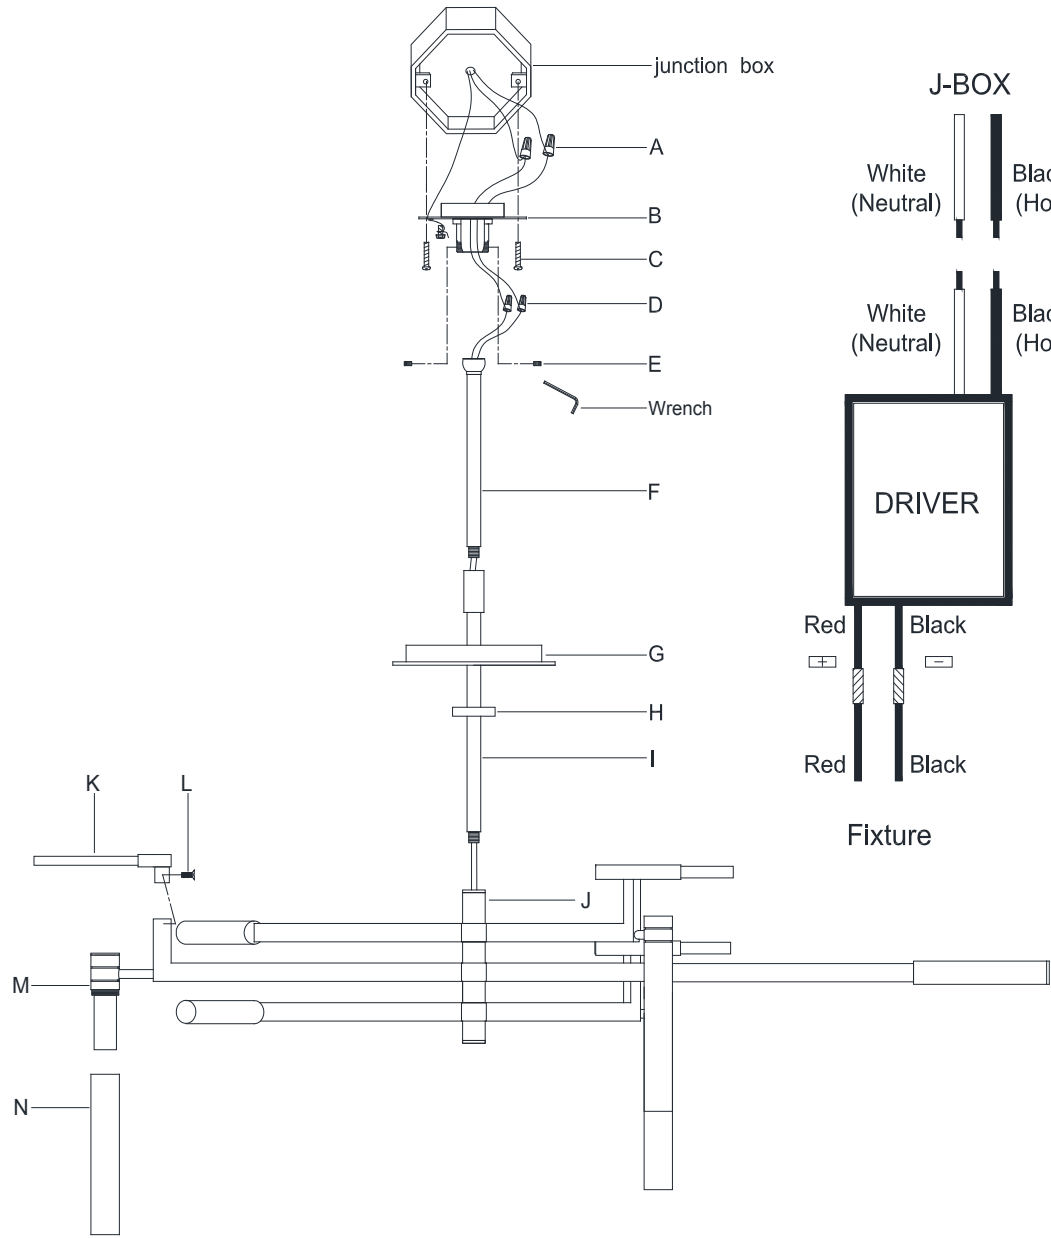

Melange Large Floating Disc Chandelier

Item # KW 5602

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

12. Put canopy (G) flush to the mounting plate (B) and secure with collar ring (H).
13. Attach the alabaster disk (K) to the top of the fixture body (J) and secure with screws (L).
14. Thread the tube (N) to the metal part (M).
15. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.