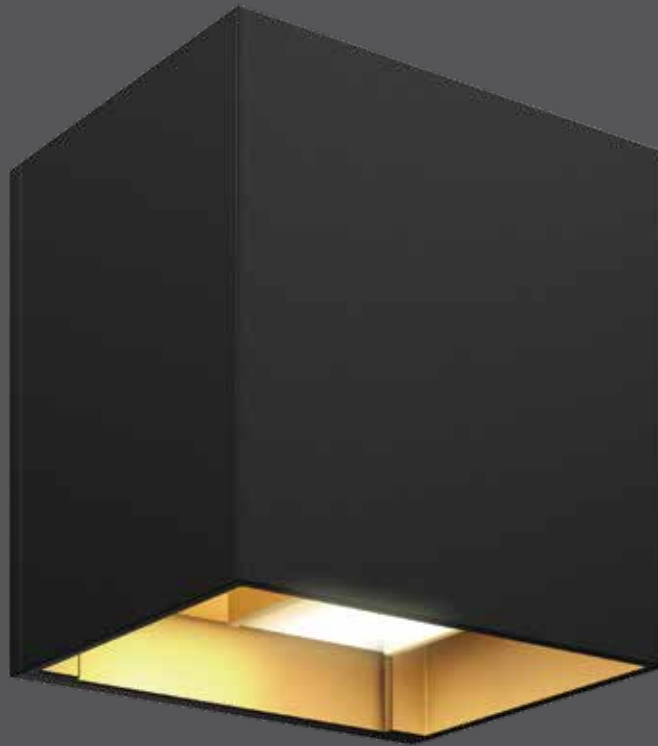

LED Wall mount

Imagine being able to manually control the amount of light spread coming from both the top and bottom of your lighting fixture. This is now possible with our LED wall mount.



ADA
COMPLIANT








Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDWALL-G	8 W	450 lm	600 lm	90	3000 K	120 V

Specifications

Made of extruded aluminum
 Over 50,000 hours of service life
 Separately adjustable up and down lighting
 Easily adjustable lighting angle from 0° to 92°
 Low power consumption
 Superior color consistency
 Directional lighting
 Integrated dimmable driver
 ADA compliant
 Suitable for wet locations
 Refer to website for dimmer compatibility
 Ideal operating temperature: -20° to 40° C
 5-year warranty

Finish

-  **BK/GD** Black, gold interior
-  **BK** Black
-  **BR** Bronze
-  **SG** Silver grey
-  **WH** White

Order example

LEDWALL-G-BK/GD
 Dimmable LEDWALL-G wall mount in a black finish with gold interior

Note

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

LEDWALL-G

