

**NERO Pendant**  
**3-686-1540**



FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-1540 Black/Aged Brass (Lit)

**LIGHT SOURCE** (26x) 2.1W LED Arrays, 3000K, CRI 90

**LUMINAIRE POWER** 64.3W at 120V

**RATED LIFE** 30000 hr RL

**OPTIONAL COLOR TEMPERATURES** 3000K Only

**LUMEN OUTPUT** Delivered: 2045 lm (LM-79)

**INPUT VOLTAGE** 120V AC, 50/60Hz

**DRIVER OUTPUT** 720mA, 30.24W max power per driver (2 drivers total - 60.48W total max output)

**DIMMING** TRIAC Dimming


**CONSTRUCTION** Cold Rolled Steel Housing and Canopy

**DIFFUSER** - Frosted Acrylic

**FINISHES** Black/Aged Brass (-1540)

**MOUNTING** 4" Octagonal J-Box

**STANDARDS** cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

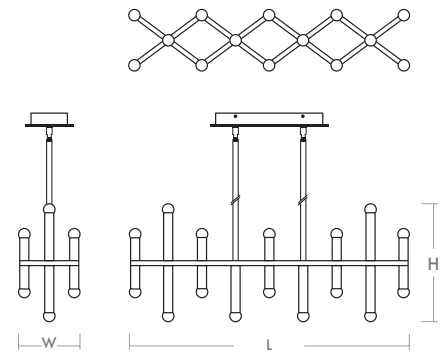

**DIMENSIONS**

**W. Fixture:** 7.375"  
**L. Fixture:** 33.50"  
**H. Fixture:** 14.125"  
**Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height**

Note: Canopy swivel allows up to a 20° slope

Order example for standard fixture:  
**3-686-1540** (x- Voltage - xxx-Sequence # - xx-Finish)  
**3:** 120V Only

