
COUNTERMAX MX-L-24-SS I SLIM STICK 24V

89800/ 89801/ 89802/ 89803/ 89804

- Aluminum finish with Black accessories
- Even distribution of LED diffused through opal white lens
- 24V system must be paired with driver accessories
- Adjustable mounting clips allow for angled installation Dimmable with LED dimmers and Touch dimmer Energy Star Certified
- Title 24 JA8 listed
- 3000K Color Temperature
- CRI 90+

Job Name : ______ Job Type : ______ Quantity : ______ Comments :

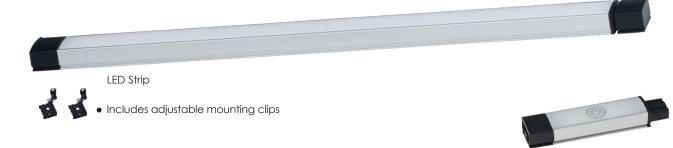

PRODUCT DESCRIPTION

Narrow Aluminum channels of LED are easily concealed in an economical way to tackle your task lighting. Installation is simple with an adjustable bracket that allows you to direct the light to where you need it, and a simple plug-in or hard wire power supply. Available in lenghts from 6" to 48" and varies accessories, Slim Stick is the easy solution for your task lighting installation.

IN-LINE DIMMER **MEASUREMENTS** DIMENSION : 3/4"W x 1/2" THICK - 0.75" : 6" 89800 4" 89801 :12" 89802 :24" LED LENGTHS : 36" 89803 7 0.75" 89804 : 48" VARIOUS LENGTHS (SEE TABLE) LAMPING INPUT VOLTAGE : 24V LUMINOSITY 89800 :3W 350lm (195lm DEL) :5W 89801 700lm (395lm DEL) 89802 :10W 1050 (780lm DEL) 89803 :15W 1400lm (1170 DEL) 89804 :20W 1750lm (1560 DEL) DIMMABLE : Triac CL, ELV, OR In-Line Dimmer (89835AL) CRI : 90+ CRI COLOR TEMP : 3000K Always consult a qualified electrician before installing any lighting product.



WESTERN DISTRIBUTION CENTER (HEADQUARTER) 253 NORTH VINELAND AVE I CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER 4200 SHIRLEY DR. I ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com



89835AL

Aluminum

MATERIAL Aluminum

RATINGS

cETLus Dry Location Energy Star JA8 Listed



ADDITIONAL

OPERATING TEMPERATURE: -20°C (-4°F), 40°C (104°F)

Job Type:_

Job Name:



Non Dimmable, Plug-in Power Supplies

Can be used with in-line dimmer switch



89811BK 24V 24W Plug-In Driver Non-dimmable



89812BK 24V 60W Plug-In Driver Non-Dimmable



89814BK 24V 96W Plug-In Driver Non Dimmable

PRODUCT DESCRIPTION

Hard Wired Power Supply 24V Constant Voltage with connector

Narrow Aluminum channels of LED are easily concealed in an economical way to tackle your task lighting. Installation is simple with an adjustable bracket that allows you to direct the light to where you need it. Available in lenghts from 6" to 48" and varies accessories, Slim Stick is the easy solution for your task lighting installation. Below you will find the plug-in or hard wire power supply options. Connecting Cords and other Accessories also listed.

MEASUREMENTS

DIMENSION HANGING WEIGHT

: 8.5" L x 2.5" W x 1.75" H : 1.5 lb

LAMPING

INPUT VOLTAGE : 120-277V VOLTAGE OUTPUT : 24V CONSTANT MAX WATTAGE 89816BK 60W Hardwire :96W Hardwire



Dimmable with Triac or ELV at 120V



90 Connector

89831BK

89830BK



89826BK

2" 89820BK 6" 89821BK 12" 89821BK**Includes ON/OFF Switch 18' 89824BK

36" Always consult a qualified electrician before installing any lighting product.



WESTERN DISTRIBUTION CENTER (HEADQUARTER) 253 NORTH VINELAND AVE I CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER 4200 SHIRLEY DR. I ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com



89835AL In Line Dimmer Switch Powers On/Off and Brightness

FINISH

Black

RATINGS

Dry Location Energy Star JA8 TITLE 24 Listed



ADDITIONAL **OPERATING TEMPERATURE:** -20°C (-4°F), 40°C (104°F)