
ASSEMBLY INSTRUCTIONS

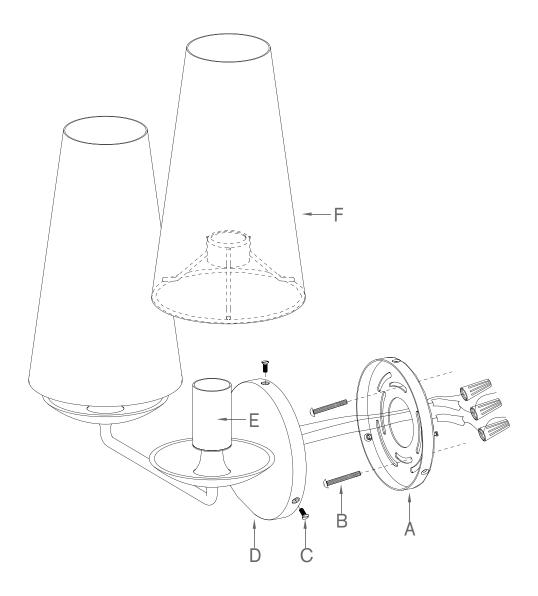

Fontaine Double Sconce

Item # ARN2202

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- Remove mounting plate (A) from base of light fixture (D) by removing base screws (C) in counter-clockwise direction.
- 2. Affix mounting plate (A) to wall outlet box with mounting screws (B) provided.
- 3. Attach ground (green or green/yellow) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tighten wrap the wire connecton with electrical tape, so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- 4. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
- Repeat the procedure with the hot (black) wires. Always make sure that
 no wire strands are left outside the connectors. DO NOT REVERSE THE
 HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE
 COMPROMISED.
- 6. Attach fixture base (D) to the affixed mounting plate (A) and tighten with base screws (C).
- 7. Insert light bulbs (not included) into sockets.
- 8. Slide the center cap of shades (F) onto the socket tubes (E).





^{***} Clean with a dry, soft cloth only. Do not use harsh abrasives or chemical agents.