





JOB NAME _____

CONTACT _____

ORDERING CODE _____

BINA Bina Surface Mount Round

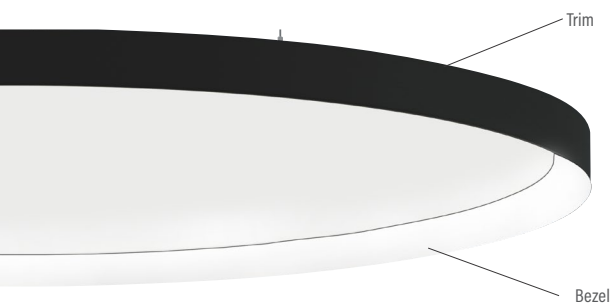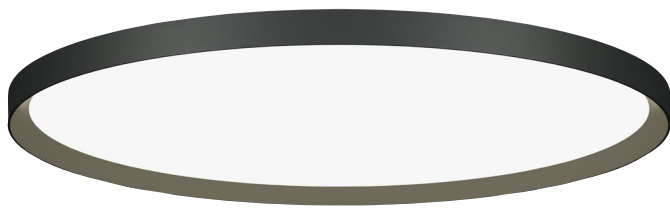

DESCRIPTION

- Slim aluminum luminaire
- Black, white or matte chrome
- Black, white, or matte chrome decorative bezel
- Ultra thin 1.5" profile

ELECTRICAL/CONTROLS

- 30, 40, 60, 78 Watt Direct Systems
- 45, 55, 86, 104 Watt Direct/Indirect Systems
- 120-277Vac, 50/60Hz input
- 0-10V Dimming to 1%

LISTING

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

LED INFO

- LED: Luminus MP Series
- SDCM: 3-step Mac Adam Ellipse
- CCT: 2700K, 3000K or 3500K
- CRI: >80
- Lumen Maintenance: $L_{70} > 50,000$ hrs

ORDERING CODE

SERIES	BINA-S	bina surface
TYPE	RD	round
CCT	27K 30K 35K	2700K 3000K 3500K
SIZE	16 24 32 40	D 16" D 24" D 32" D 40"
CURRENT	325 500 675 850 1050	325mA 500mA 675mA 850mA 1050mA
LIGHT OUTPUT	D DI	direct only direct/indirect
HOUSING COLOR	BK WH MC	black white matte chrome
BEZEL COLOR	BK WH MC	black white matte chrome

ORDERING CODE _____

Follow the steps to specify your fixture, example:
BINA-S-RD-27K-32-500-D-WH-BK

DIRECT (3000K)					
SIZE	325MA	500MA	675MA	850MA	1050MA
16"	880lm / 11W	1360lm / 16W	1800lm / 20W	2230lm / 25W	2720lm / 32W
24"	1230lm / 13W	1900lm / 20W	2510lm / 27W	3115lm / 34W	3790lm / 42W
32"	1830lm / 21W	2830lm / 33W	3750lm / 43W	4640lm / 53W	5650lm / 63W
40"	2435lm / 27W	3770lm / 42W	4960lm / 54W	6145lm / 67W	7510lm / 82W

INDIRECT (3000K)					
SIZE	325MA	500MA	675MA	850MA	1050MA
16" / 24"	525lm / 6W	790lm / 8W	1050lm / 10W	1300lm / 12W	1575lm / 15W
32" / 40"	860lm / 9W	1330lm / 14W	1800lm / 18W	2270lm / 23W	2900lm / 28W

